


## **Bonding/sealing Polymer Allows UV or Heat curing**

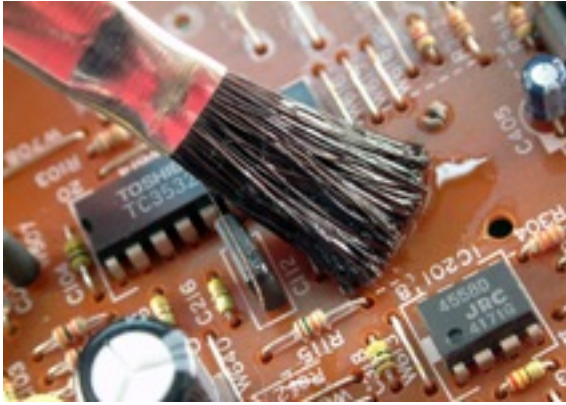

Proving an optically clear, non-yellowing bonding, sealing, or coating material for substrates such as glass, metals, plastics, polyester films, and polycarbonates, the UV15-7DC polymer from Master Bond can cure using UV light or heat. Typical UV cure times range from 5 seconds to 2-3 minutes depending upon the wave length, intensity of the UV light, and the thickness being cured, with typical heat curing schedules of 10-30 minutes at 250°-260°F. Available in syringe, pint, quart, gallon, and 5-gallon containers, the material has a Shore D hardness of greater than 70 and an elongation of 65% to 75% with a tensile strength of 5,460 psi.

Master Bond  
201-343-8983 [www.masterbond.com](http://www.masterbond.com) [1]

**Source URL (retrieved on 01/28/2015 - 11:31am):**

[http://www.ecnmag.com/product-releases/2008/03/bonding/sealing-polymer-allows-uv-or-heat-curing?qt-recent\\_content=0&qt-most\\_popular=0](http://www.ecnmag.com/product-releases/2008/03/bonding/sealing-polymer-allows-uv-or-heat-curing?qt-recent_content=0&qt-most_popular=0)

**Links:**

[1] <http://www.masterbond.com/>