


MIL-STD-1553 test and simulation tool includes amplitude range of 0V to 20.5V

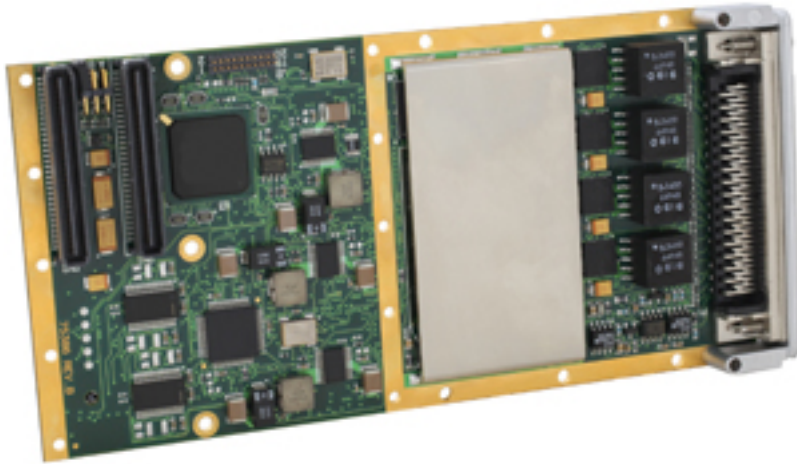

Data Device Corporation (DDC) adds variable voltage programmability to the BU-67210F/I/T one to four channel MIL-STD-1553 AceXtreme PMC, PCI, and cPCI/PXI Card family to create a feature-rich and highly dynamic test, simulation, and verification tool. Each MIL-STD-1553 channel can be independently programmed for transmitter amplitudes ranging from 0V to 20.5V in order to fully ensure DUT (Device Under Test) out-of-bounds electrical functionality and compliance.

Benefits include:

- Ensure DUT Compliance and Functionality
 - Variable Voltage Facilitates Out-of-Bounds Electrical Testing
 - Wide Amplitude Range (0V to 20.5V)
- Optimized for Test Labs
 - Dynamic I/O Mix
 - Multi-Function BC + Multi-RT + MT Versatility
 - Full Error Detection and Injection

For more information, visit www.ddc-web.com [1]

Source URL (retrieved on 01/31/2015 - 11:17am):

http://www.ecnmag.com/product-releases/2012/11/mil-std-1553-test-and-simulation-tool-includes-amplitude-range-0v-205v?qt-most_popular=0&qt-video_of_the_day=0

Links:

[1] <http://www.ddc-web.com>